



# PROPER ENCLOSURE SOLUTIONS LTD


## Overview

The PES 300 Series Enclosures are purpose designed for allowing the front entry of impulse lines into the enclosure. The 5 sizes of Enclosure in the range allows for the versatile installation of single or multiple instruments on base mounted brackets or panel mounted to the rear wall.

## Standard Specification

Fully weatherproof diagonally split enclosure, with Stainless Steel hinges, propstay(s) and toggle fasteners. External & Internal Gel-Coated surfaces providing superior weathering, corrosion and UV resistance. IP66 Weatherproof seal provided by a Neoprene gasket. Standard colour RAL7032 Light Grey, or Anti-Static Mid-Grey. Lift-off Lid Version available on request.

Model	A	B	C	D
PE301	385	489	383	93
PE302	460	504	455	83
PE303	611	506	457	83
PE304	700	500	500	84
PE305	1000	500	500	84

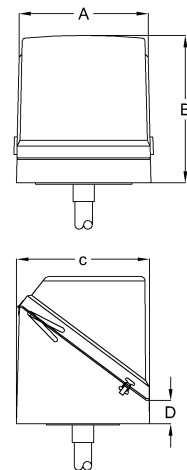

## Options

The PES 300 Series of Enclosures can be supplied fitted with any of the wide range of available Enclosure accessories.

Manifolds and Instruments from all manufacturers can be sourced and installed along with tubing and tube fittings in all materials. Winterisation, or temperature controlled heating can be achieved by fully encapsulated PU Foam Insulation and Electric or Steam Heating. Viewing windows, cable / tubing entries, ventilation / drains / over-pressure and identification tags can all be included to provide a ready to install complete package that can be delivered direct to site.



3  
0  
0  
S  
E  
R  
I  
E  
S  
I  
N  
S  
T  
R  
U  
M  
E  
N  
T  
E  
N  
C  
L  
O  
S  
U  
R  
E  
S